



DVI-Digital to P&D-Digital



- LFH™ (Low Force Helix) rugged contacts offer increased life cycle, mechanical and electrical reliability
- Supports up to 1.65 Gbs bandwidth per differential pair
- Fully shielded against RFI/EMI
- Grounding detents on mating shell
- Solder tails for cable termination
- Positive retention jackscrew: thread 4-40 UNC-2A

Voltage: 40V
Current: 1.5A
Dielectric Withstanding Voltage: 500V
Insulation Resistance: 1000 MΩ min.

Mating Force: 10.0 lbf (4.5kgf) max.
Unmating Force: 2.2 lbf (1.0kgf) min.
Durability: 100 cycles

Designed In: Millimeters

Plating: Gold flash, 30μ" Gold available upon request
Temperature: -20 to +85°C

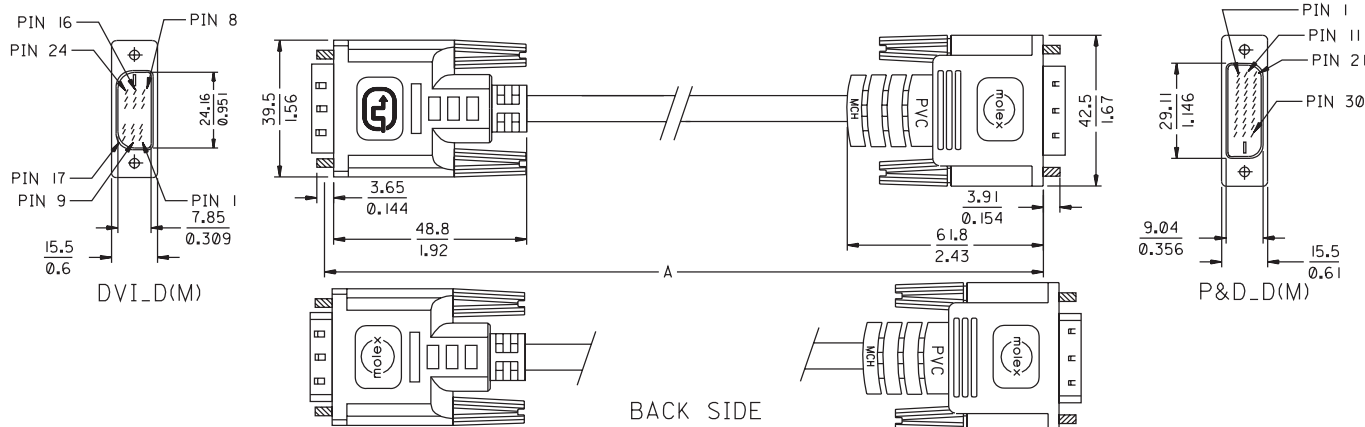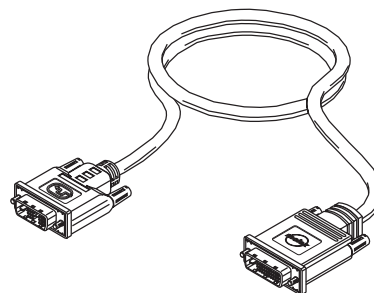

Order No.	Description	Dimension A	Color
88741-8500	DVI-Digital to P&D Digital Cable Assembly	2m (6.56ft)	Black
88741-8510	DVI-Digital to P&D Digital Cable Assembly	3m (9.84ft)	Black
88741-8520	DVI-Digital to P&D Digital Cable Assembly	5m (16.40ft)	Black
88741-8501	DVI-Digital to P&D Digital Cable Assembly	2m (6.56ft)	White
88741-8511	DVI-Digital to P&D Digital Cable Assembly	3m (9.84ft)	White
88741-8521	DVI-Digital to P&D Digital Cable Assembly	5m (16.40ft)	White

